

TELEPHONE: 1-800-463-0400


www.jrperreault.com

## JET PUMP 56J, CAPACITOR START, TEFC

HP	RPM	FRAME	VOLTS	AMPS 230 VOLTS	EFFICIENCY	POWER FACTOR	L.R.T.	L.R.A.	B.D.T.	SERVICE FACTOR	C DIMENSION	WR. LBS	LIST PRICE
1/3	3450	56J	115/230	2.4	57	82	300	7	180	1.15	11.9	23	315.00 \$
1/2	3450	56J	115/230	3.1	63	83	280	7	180	1.15	11.9	24	330.00 \$
3/4	3450	56J	115/230	4.5	64	83	280	7	180	1.15	11.9	26	348.00 \$
1	3450	56J	115/230	6.2	64	83	250	7	180	1.15	12.9	32	415.00 \$
1.5	3450	56J	115/230	8.7	66	84	250	7	180	1.15	12.9	40	528.00 \$
2	3450	56J	115/230	10.8	72	84	250	7	180	1.15	13.5	43	618.00 \$
3	3450	56J	230	15.2	75	85	250	7	180	1.15	13.9	48	698.00 \$

## JET PUMP 56J, THREE PHASES, TEFC

HP	RPM	FRAME	AMPS 460 VOLTS	AMPS 575 VOLTS	EFFICIENCY	POWER FACTOR	L.R.T.	L.R.A.	B.D.T.	SERVICE FACTOR	C DIMENSION	WR. LBS	LIST PRICE
1/3	3450	56J	0.65	0.52	59	83	400	700	420	1.15	11	21	310.00 \$
1/2	3450	56J	0.88	0.71	62	85	400	700	400	1.15	11	22	320.00 \$
3/4	3450	56J	1.2	0.96	69	85	380	700	390	1.15	11	24	338.00 \$
1	3450	56J	1.6	1.3	69	85	380	700	370	1.15	11	26	355.00 \$
1.5	3450	56J	2.3	1.9	72	85	390	700	350	1.15	11	30	452.00 \$
2	3450	56J	2.7	2.2	80	88	360	900	360	1.15	11.5	35	482.00 \$
3	3450	56J	3.8	3.1	80	88	340	800	350	1.15	12.4	40	538.00 \$

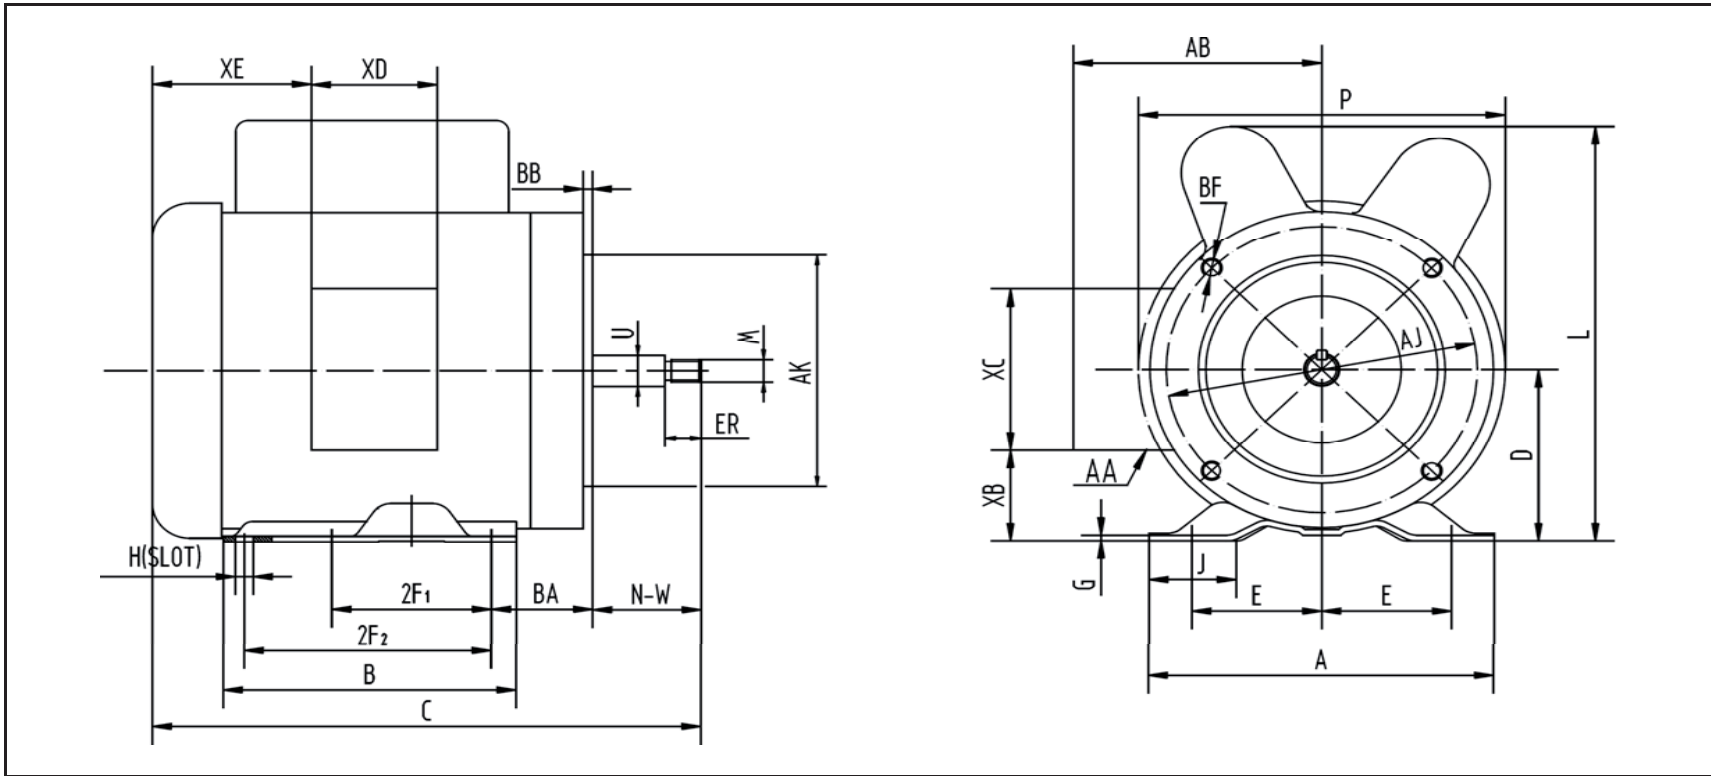

MOUNTING					A	B	C	D	G	J	L	P	AA
E	2F1	2F2	H	BA	A	B	C	D	G	J	L	P	AA
2.44	3	5	0.34	2.75	6.5	6.5	***	3.5	0.12	1.73	8.5	6.9	1/2

FLANGE					SHAFT				TERMINAL BOX			
AB	AJ	AK	BB	BF	ER	M	N-W	U	XB	XC	XD	XE
5.35	5.875	4.5	0.16	3/8-16	0.68	7/16-20	2.4	0.625	1.65	3.7	3.23	2.85

\*\*\* CHECK LIST PRICE FOR 'C' DIMENSION

**ALL DIMENSIONS IN INCHES**